

inbertec



Phone:
+86-592-6154911


E-mail:
sales@inbertec.com

Web:
www.inbertec.com

Xiamen Inbertec Electronic Technology Co., Ltd

Add:Room 603, 492 XingLinWan Rd, Jimei District, Xiamen, China 361022

Cetus Series Great Value Headset

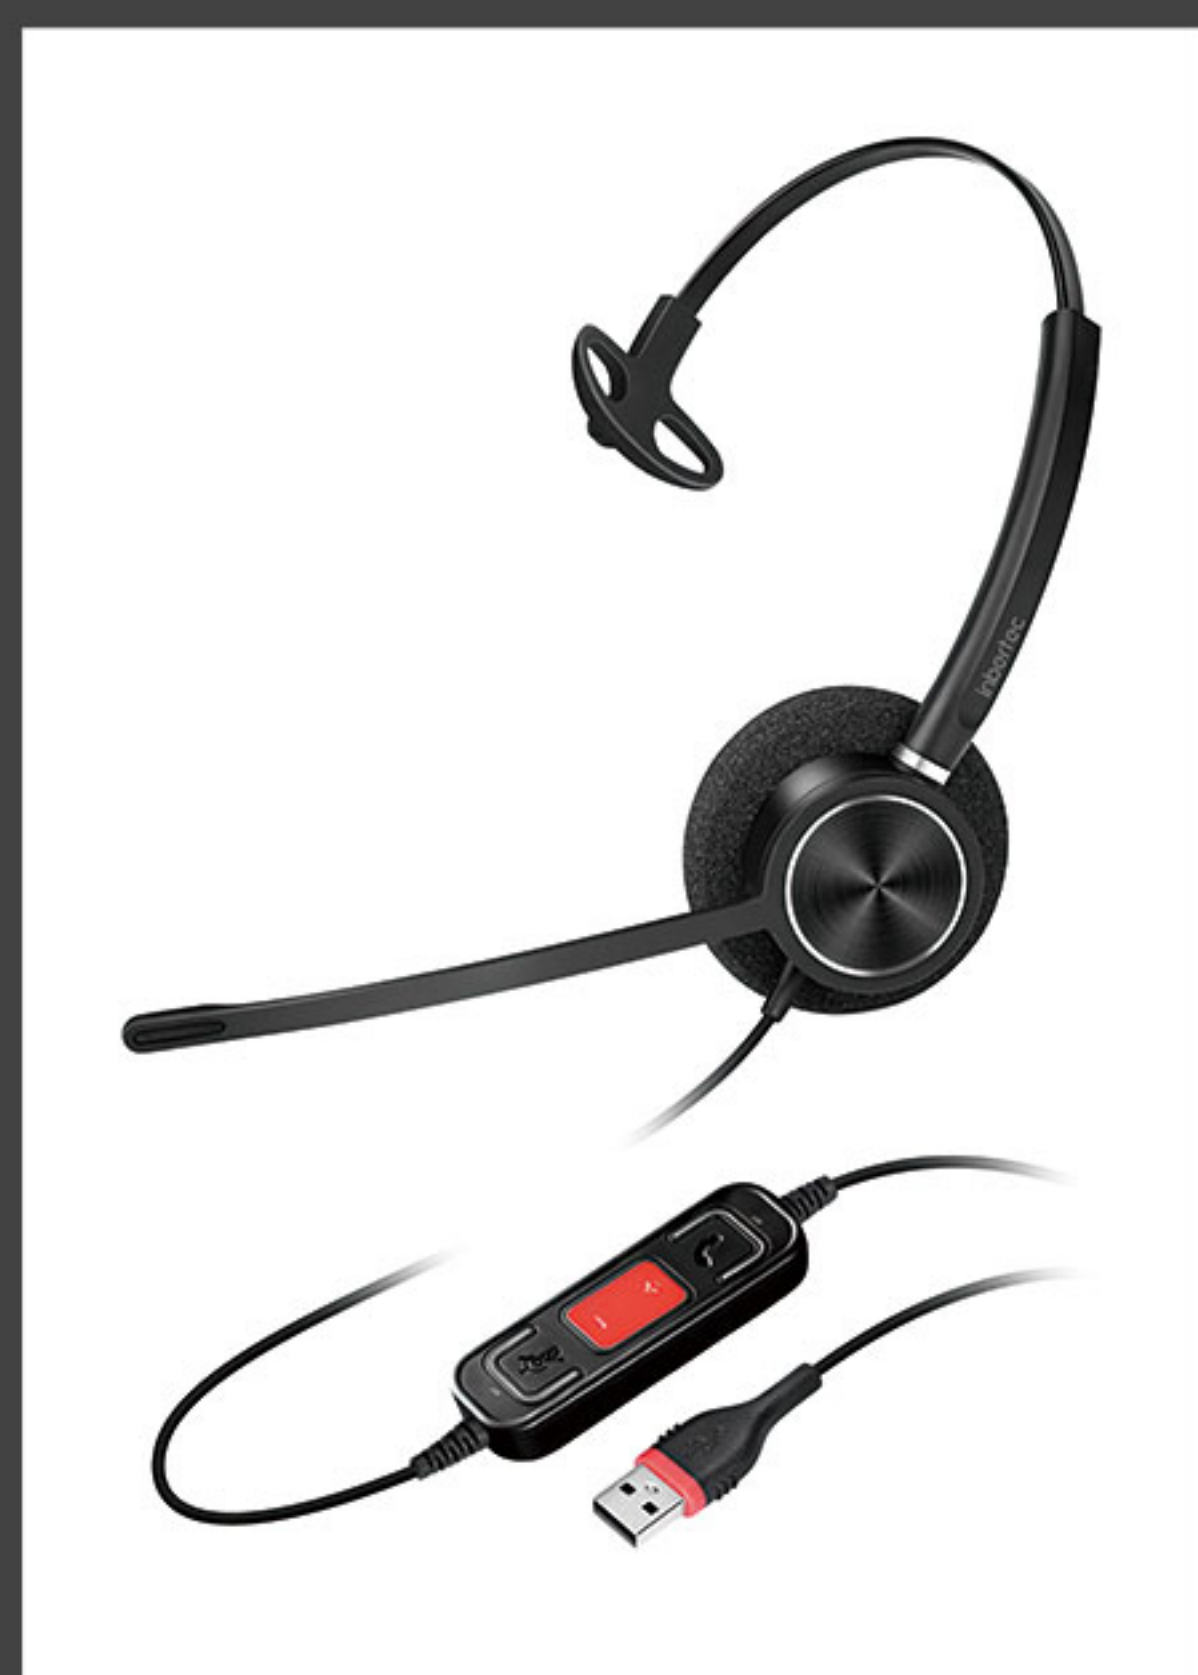


C15M



C15DM



C25M

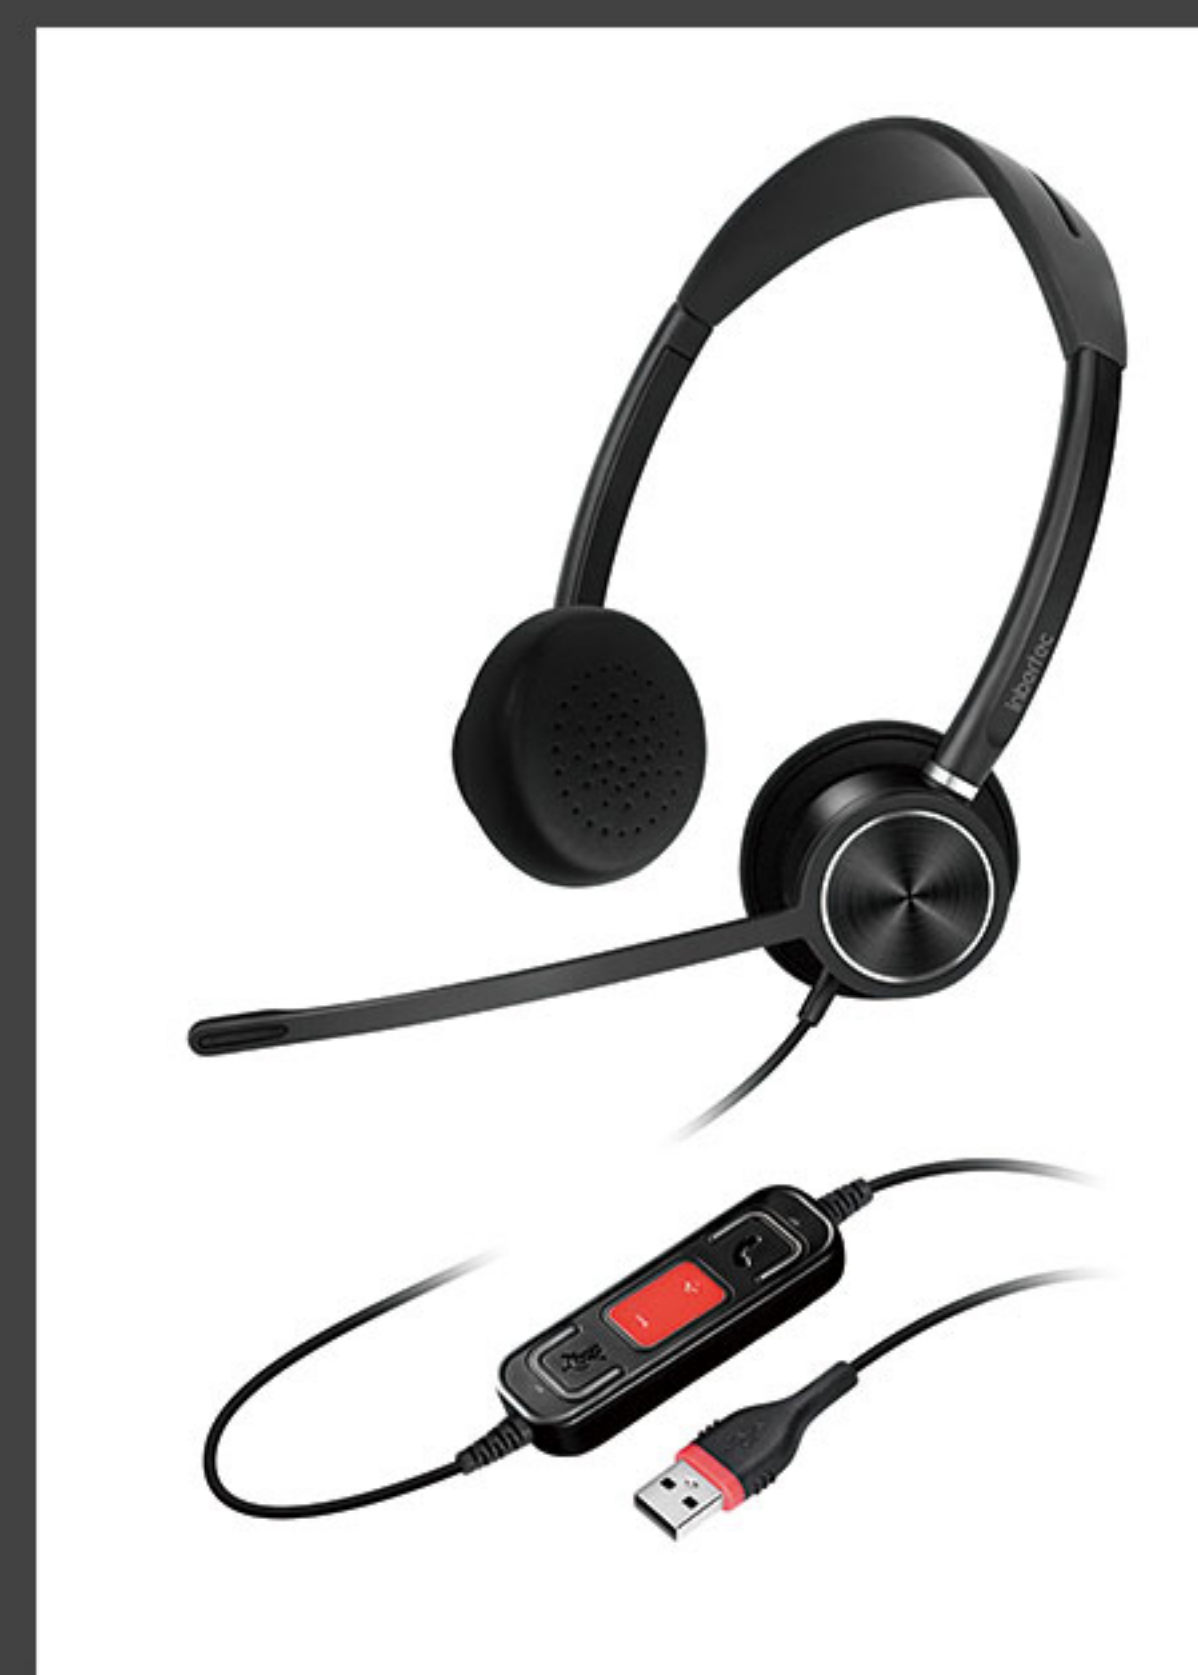

C25DM

ENC Dual Mic Array Omni-Directional

Electret condenser noise cancelling microphone reduces the back ground noise greatly



High-Definition Stereo Sound

Wideband audio technology to provide crystal clear speech voice quality Stereo Sound design to let you enjoy the music




Elegant Design

Stylish CD pattern and Metallic like decoration
Modern design of Microphone Boom




Reliability

Advanced processing technology to ensure the durability of the structure
High durable materials to ensure a long lifespan of the headset

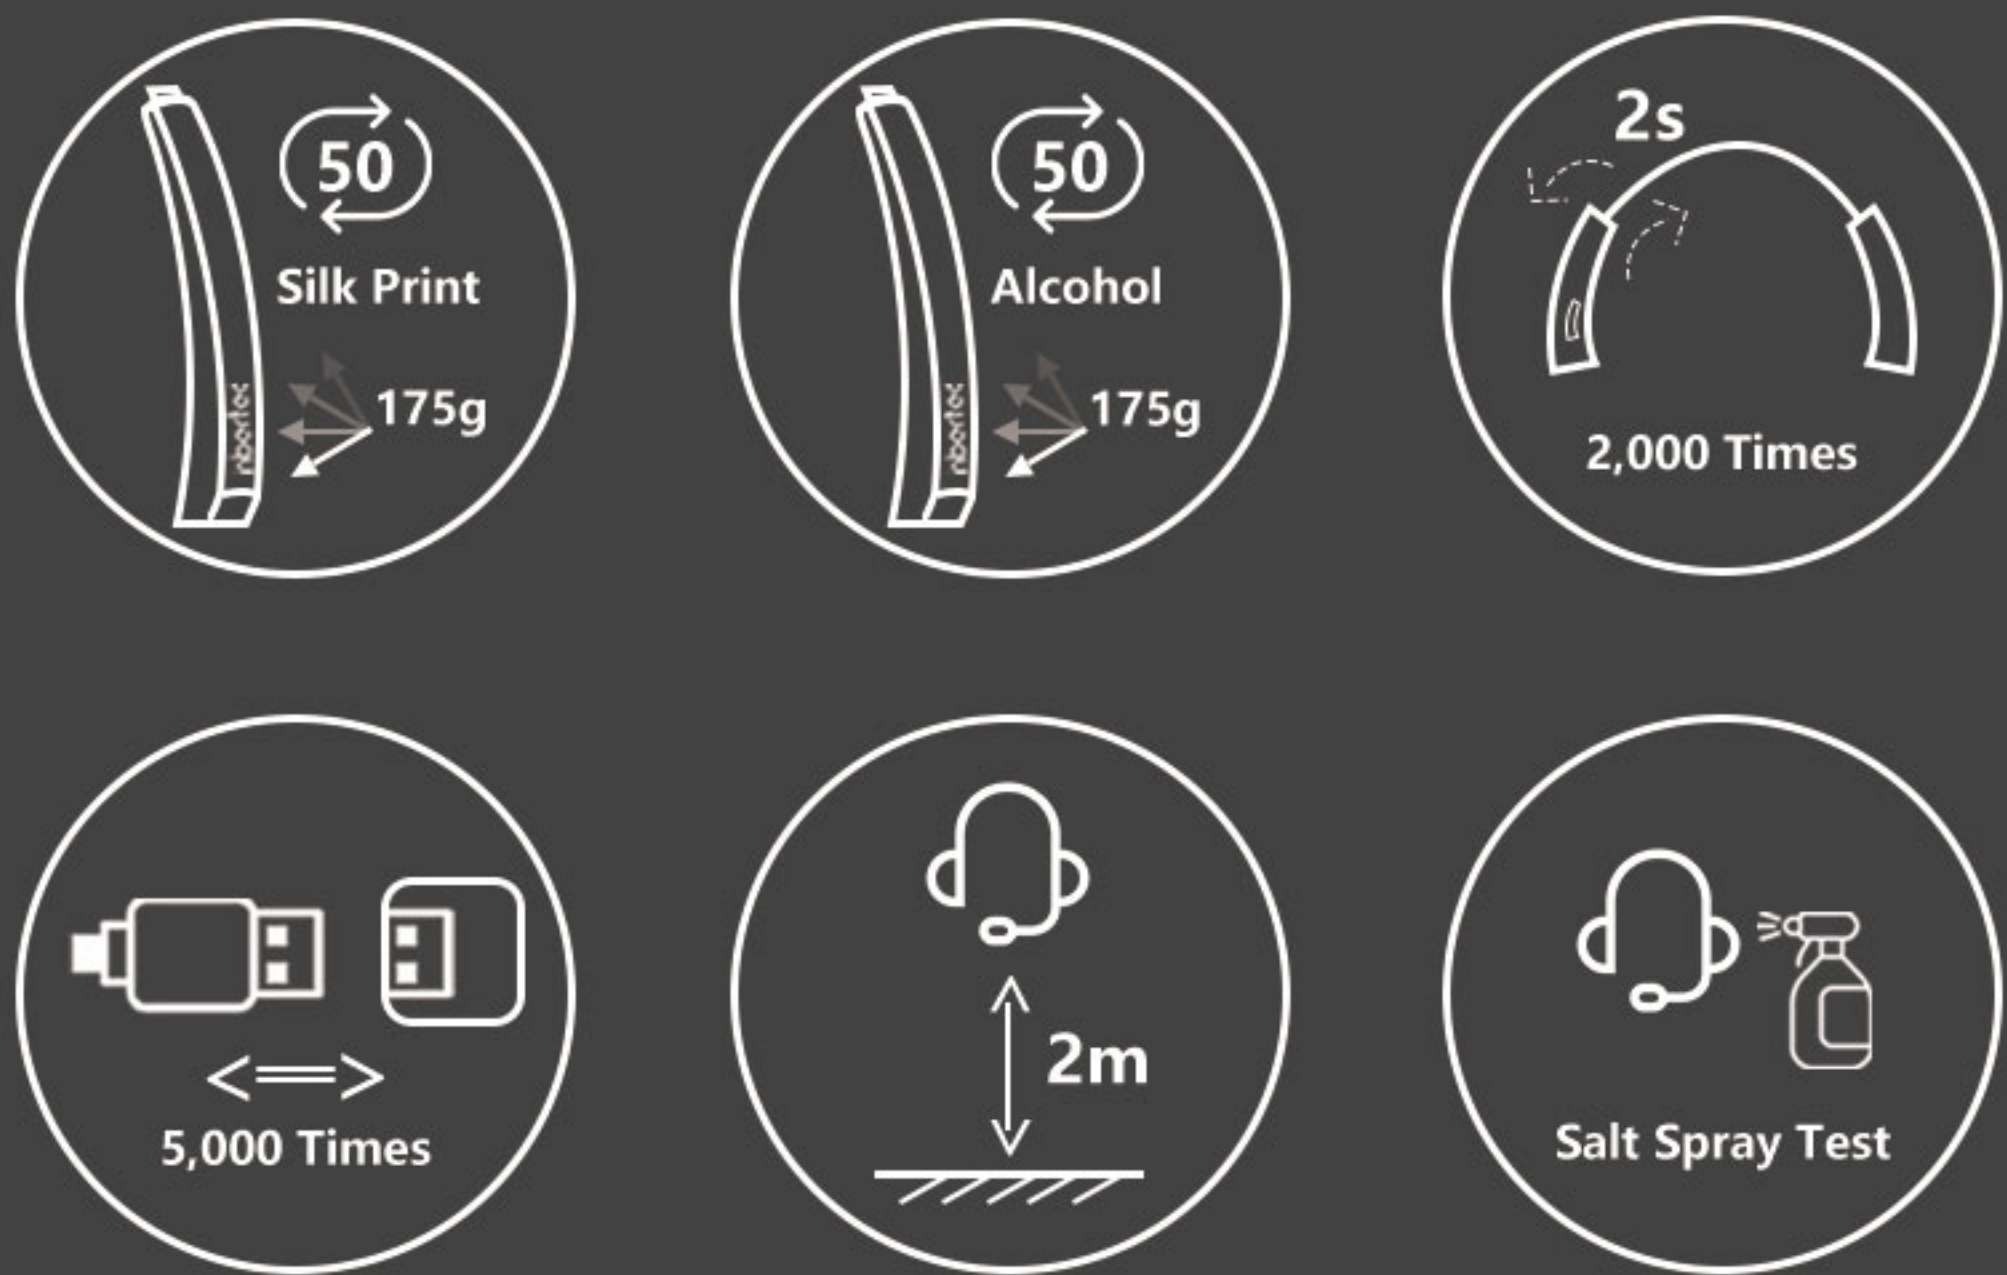

Comfortable and Easy to Use

Flexible Mic Boom Arc with Accurate Mic Positioning
Intuit Inline Control Box design
Rotatable Ear Plate to fit perfectly when wearing

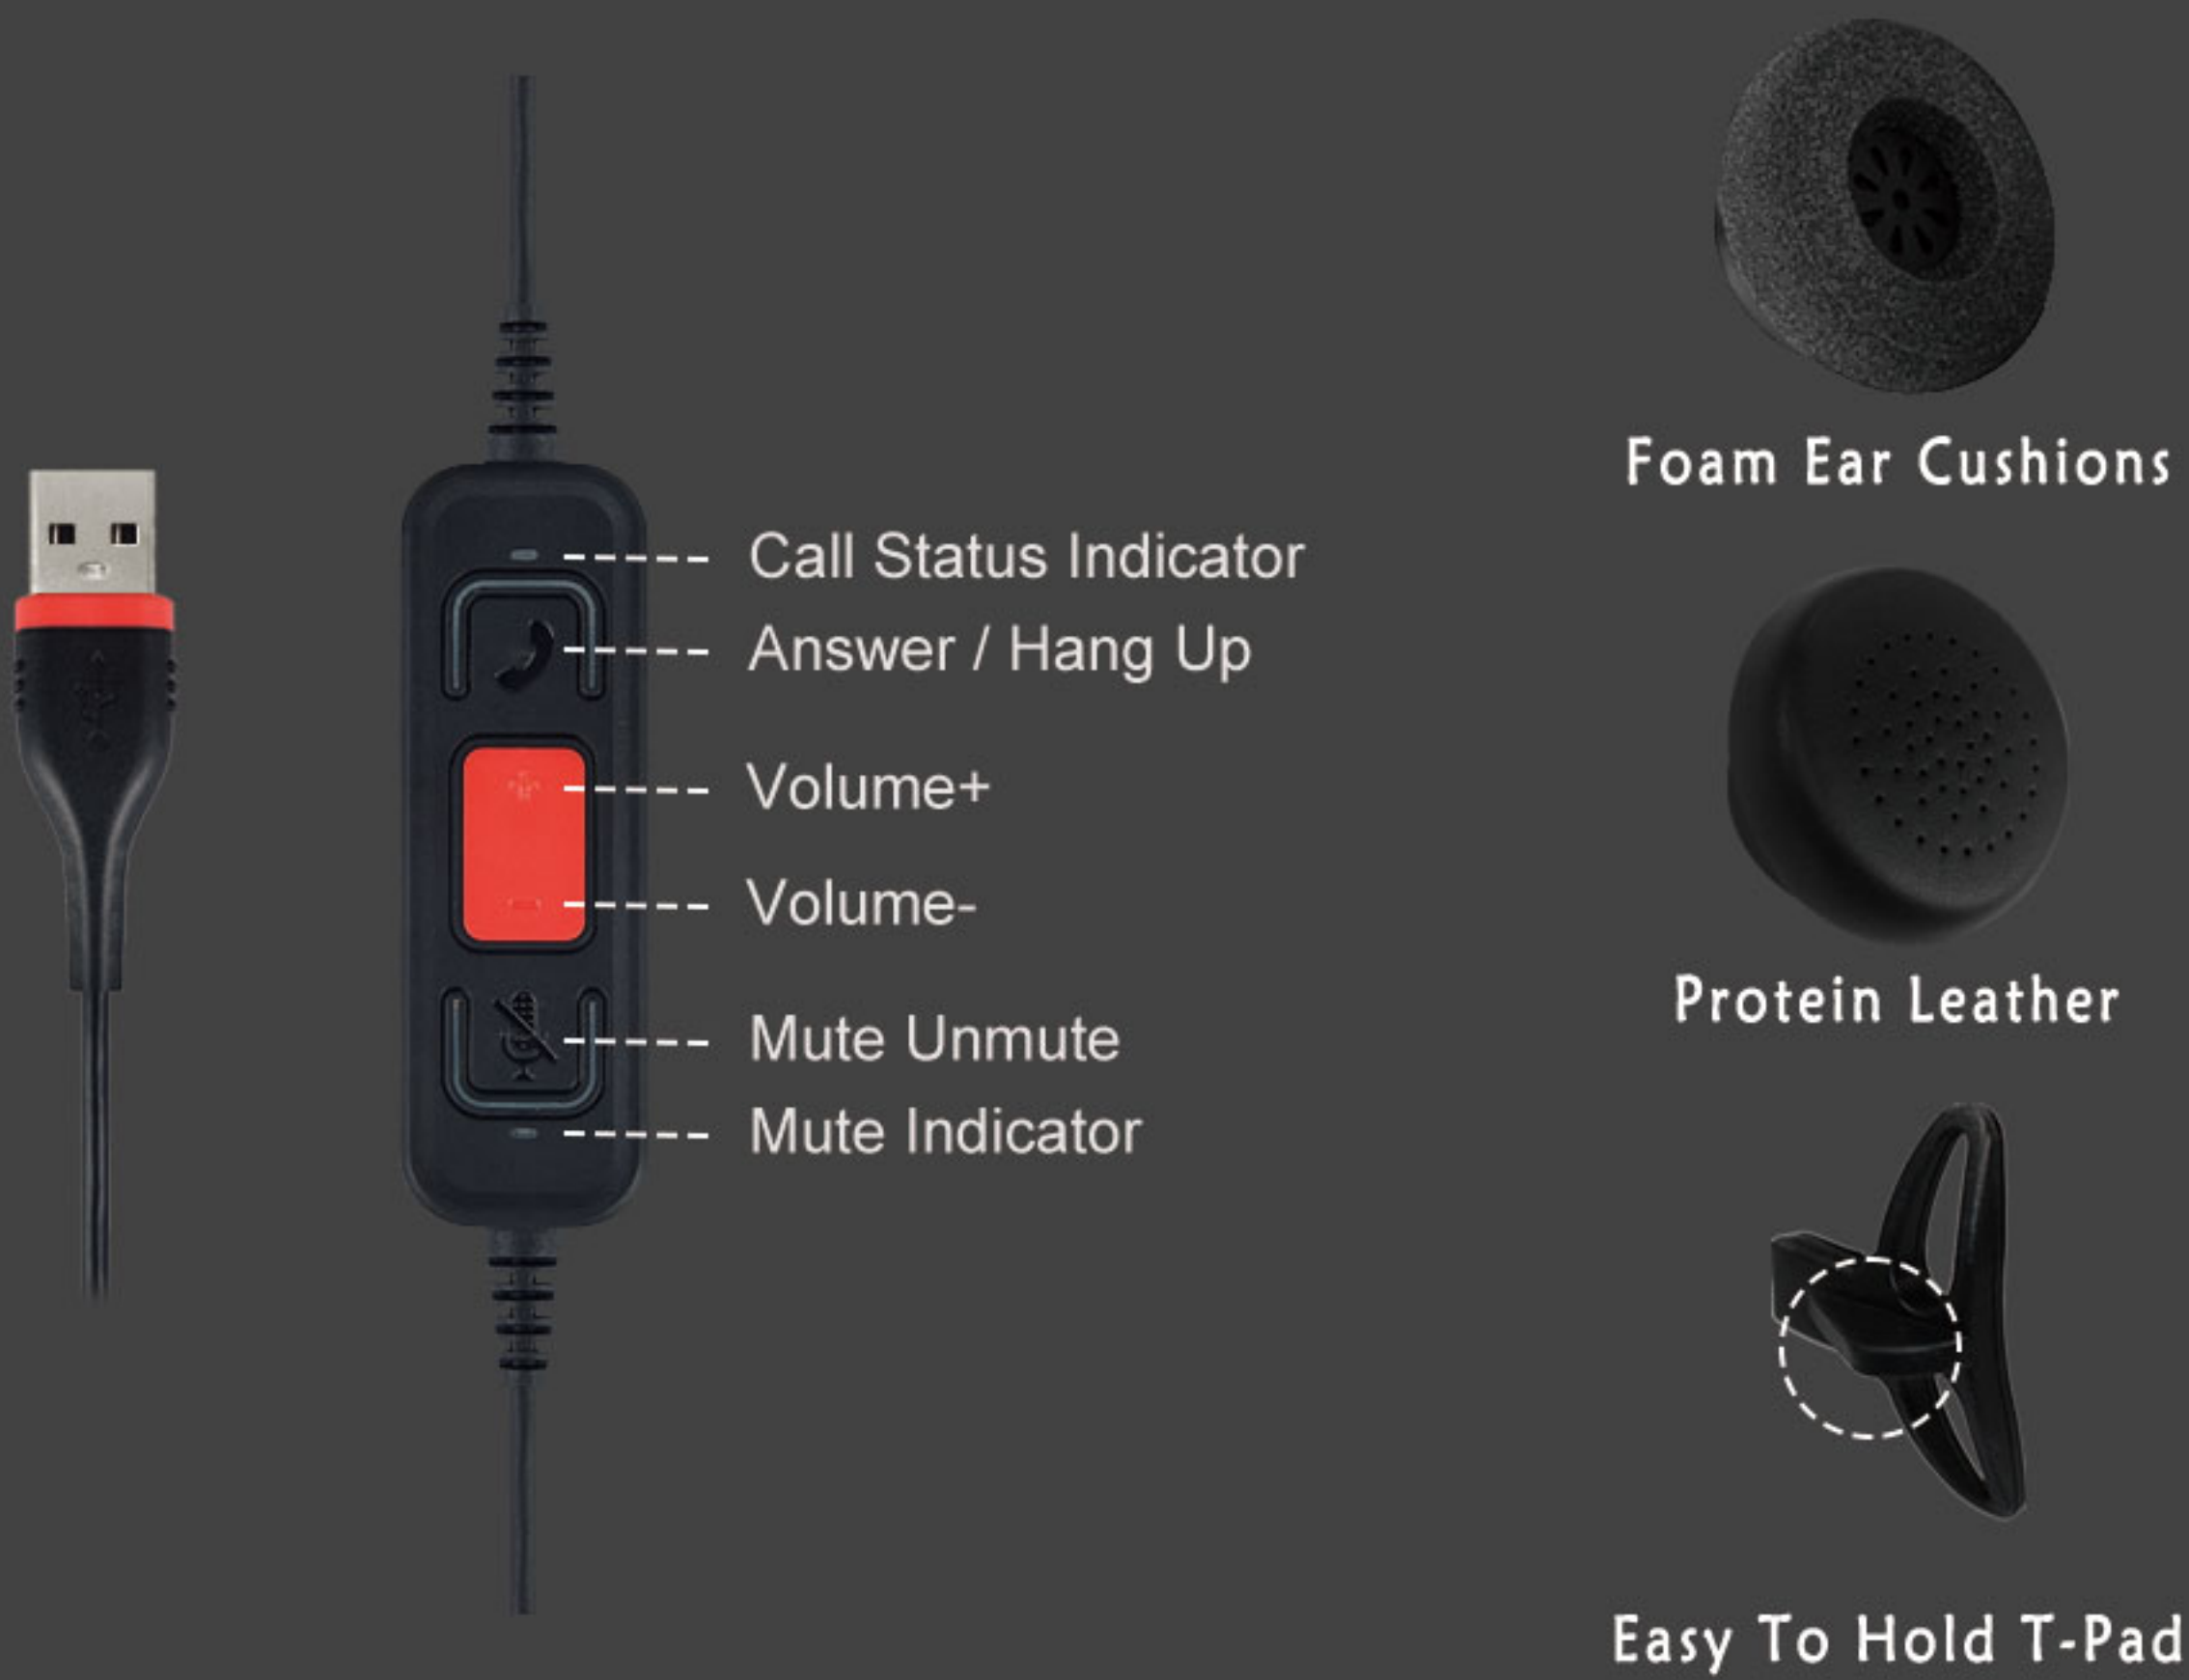

Model	Monoaural Binaural	C15M C15DM	C25M C25DM
Audio Performance	Hearing Protection	118dBA SPL	118dBA SPL
	Speaker Size	Φ28	Φ28
	Speaker Max Input Power	30mW	30mW
	Speaker Sensitivity	105±3dB	105±3dB
	Impedance	32±20%Ω	32±20%Ω
	Speaker Frequency Range	20Hz~20KHz	20Hz~20KHz
	Microphone Directionality	ENC Dual Mic Array Omni-Directional	ENC Dual Mic Array Omni-Directional
	Microphone Sensitivity	-32±3dB@1KHz	-32±3dB@1KHz
	Microphone Frequency Range	100Hz~10KHz	100Hz~10KHz
Call Control	Mute, Volume +/-	Yes	Yes
Wearing	Wearing Style	Over-the-head	Over-the-head
	Mic Boom Rotatable Angle	320°	320°
	Ear Cushion	Foam	Protein Leather
Connectivity	Connects to	Desk phone PC soft phone laptop	Desk phone PC soft phone laptop
	Connector Type	USB-A	USB-A
	Cable Length	210cm	210cm
General	Package Content	Headset User Manual Cloth clip	Headset User Manual Cloth clip
	Gift Box Size	190mm*153mm*40mm	
	Weight(Mono/Duo)	86g/112g	110g/141g
	Certifications	UKCA CE FC CAN ICES-003 (B) /NMB-003 (B)	
	Working Temperature	-5°C~45°C	
	Warranty	24 months	